

VALVES WITHOUT DRAIN	TIPE	CONNECTIONS	ORIFICE	PTFE PACKING REFERENCES			GRAPHITE PACKING REFERENCES		
				S. STEEL	C. STEEL	BRASS	S. STEEL	C. STEEL	BRASS
	A	THREAD NPT	4	144V1	144V2	144V3	144VG1	144VG2	144VG3
	B	THREAD ISO 228	4	C144V1	C144V2	C144V3	C144VG1	C144VG2	C144VG3
	C	THREAD ISO 228	4	C144VB1	C144VB2	C144VB3	C144VBG1	C144VBG2	C144VBG3
	D	THREAD ISO 228	4	C144MF1	C144MF2	C144MF3	C144MFG1	C144MFG2	C144MFG3
	E	THREAD ISO 228	4	C144VY1	C144VY2	C144VY3	C144VYG1	C144VYG2	C144VYG3
VALVES WITH DRAIN	A	THREAD NPT	4	144VE1	144VE2	144VE3	144VEG1	144VEG2	144VEG3
	B	THREAD ISO 228	4	C144VE1	C144VE2	C144VE3	C144VEG1	C144VEG2	C144VEG3
	C	THREAD ISO 228	4	C144VBE1	C144VBE2	C144VBE3	C144VBEG1	C144VBEG2	C144VBEG3
	D	THREAD ISO 228	4	C144MFE1	C144MFE2	C144MFE3	C144MFEG1	C144MFEG2	C144MFEG3
	E	THREAD ISO 228	4	C144VYE1	C144VYE2	C144VYE3	C144VYEG1	C144VYEG2	C144VYEG3

**CHARACTERISTICS**

**2) RATING:**

**STAINLESS STEEL Graphite packing**  
5000 PSI from -20°F to 100°F  
3053 PSI to 662°F Maximum


**STAINLESS STEEL PTFE packing**  
5000 PSI from -20°F to 100°F  
Maximum service temperature of PTFE 446°F

**CARBON STEEL Graphite packing**  
5140 PSI from -20°F to 100°F  
4200 PSI to 482°F Maximum

**CARBON STEEL PTFE packing**  
5140 PSI from -20°F to 100°F  
Maximum service temperature of PTFE 446°F

**BRASS Grafoil and PTFE packing**  
Maximum 2500 PSI to 100°F  
Maximum service temperature 402°F

Connections: NPT (ANSI/ASME B1.20.1) and ISO 228  
Manufacture materials STAINLESS STEEL Grade 316,  
CARBON STEEL and BRASS.  
Forged body in the three materials.  
Stem of STAINLESS STEEL Grade 316 in all the versions.  
Handwheel of POLIAMIDA 6  
All types can be supplied with drain screw.  
Valves suitable for assembling on panel.

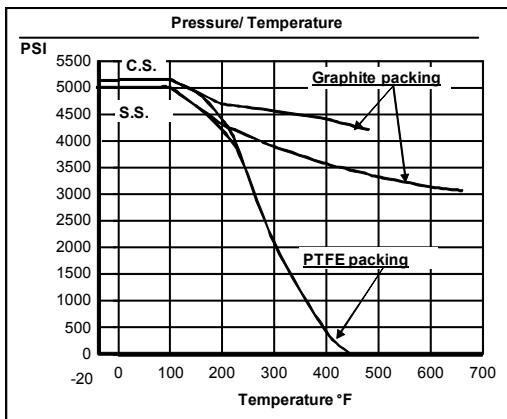

CAT.	7	15-05-2005	1710		
	0	24-10-1988	Published		
	Rev.	Date	Description	Prepared	Checked