

VALVES WITHOUT DRAIN							
CONNECTIONS	ORIFICE	PTFE PACKING REFERENCES			GRAPHITE PACKING REFERENCES		
		S. STEEL	C. STEEL	BRASS	S. STEEL	C. STEEL	BRASS
THREAD ISO 228	4	C184VY1	C184VY2	C184VY3	C184VYG1	C184VYG2	C184VYG3
VALVES WITH DRAIN							
THREAD ISO 228	4	C184VYE1	C184VYE2	C184VYE3	C184VYEG1	C184VYEG2	C184VYEG3

CHARACTERISTICS

2) RATING:

STAINLESS STEEL Graphite packing
 5000 PSI from -20°F to 100°F
 3053 PSI to 662°F Maximum


STAINLESS STEEL PTFE packing
 5000 PSI from -20°F to 100°F
 Maximum service temperature of PTFE 446°F

CARBON STEEL Graphite packing
 5140 PSI from -20°F to 100°F
 4200 PSI to 482°F Maximum

CARBON STEEL PTFE packing
 5140 PSI from -20°F to 100°F
 Maximum service temperature of PTFE 446°F

BRASS Graphite and PTFE packing
 Maximum 2500 PSI to 100°F
 Maximum service temperature 402°F

Connections: ISO 228
 Manufacture materials STAINLESS STEEL Grade 316,
 CARBON STEEL and BRASS.
 Forged body in the three materials.
 Stem of STAINLESS STEEL Grade 316 in all the versions.
 Handwheel of POLIAMIDA 6
 All types can be supplied with drain screw.
 Valves suitable for assembling on panel.

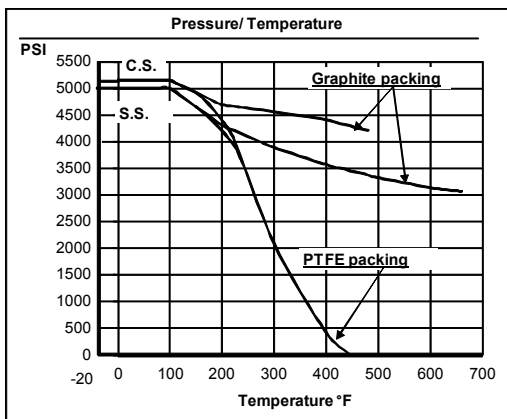

CAT.	1	16-06-2005	1710		
	0	22-02-2001	Published		
	Rev.	Date	Description	Prepared	Checked