


Posición válvula abierta

Posición válvula disparada

Conexiones	Dimensiones		Referencias
	H	L	
H.1/4"NPT	30	67	E86N02N02000.001
H.3/8"NPT	30	67	E86N03N03000.001
H.1/2"NPT	30	78	E86N04N04000.001
M.1/4"NPT	30	72	E87N02N02000.001
M.3/8"NPT	30	73	E87N03N03000.001
M.1/2"NPT	30	80	E87N04N04000.001
8 O.D.	30	66	E88008008000.001
3/8"O.D.	30	67.8	E88009009000.001
10 O.D.	30	67.8	E88010010000.001
12 O.D.	30	67.8	E88012012000.001
1/2"O.D.	30	67.8	E88013013000.001

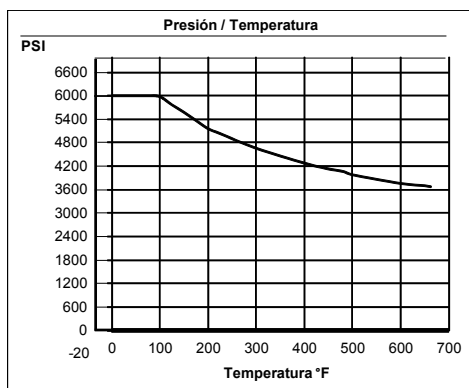

Rating:

6000 PSI de -20°F a 100°F

3676 PSI a 662°F Máximo

Conexiones:

NPT (ANSI/ASME B1.20.1) y Tubo O.D.
por anillos de compresión tipo MEGALOK.

Materiales:

Cuerpo y pistón en inox. grado 316

Resorte en inox. grado 302

CAT.						
	0	23-04-2015	Editado			
	Rev.	Fecha	Objeto	Rlzdo.	Compdo.	